




## INSTRUCTIONS FOR SIOUX DEPTH LOCATORS NOS. 53242 AND 53087

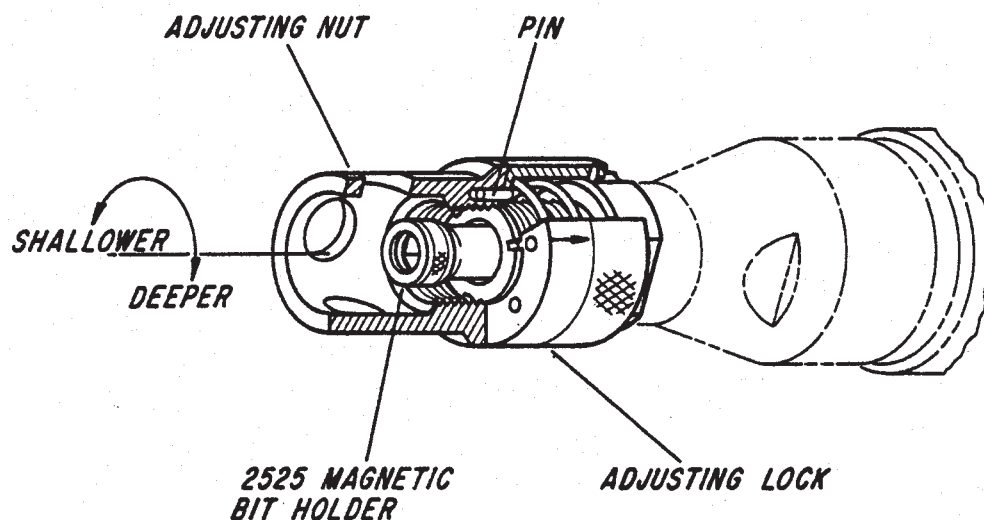

Pull back (toward tool) on adjusting lock in direction of arrow far enough to release from pin in adjusting nut. Continue to hold lock back while rotating the adjusting nut to the desired setting (Note direction of arrow for a deeper or shallower setting). Release lock and turn adjusting nut until pin falls in hole of adjusting lock. This will lock the setting.

Each hole of rotation (1/6 turn) of the adjusting nut is equal to approximately .005".

### ▲ WARNING



Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or other reproductive harm.

### ▲ ADVERTENCIA



El polvo generado al lijar, aserrar, afilar, taladrar y realizar otras tareas de construcción contiene sustancias químicas que podrían causar cáncer, malformaciones congénitas y otras alteraciones del aparato reproductor.

# SIOUX TOOLS INC.