




D-HANDLE IMPACT WRENCHES

POWER UP TO NEW 1", 1-1/2", & #5 SPLINE IMPACTS

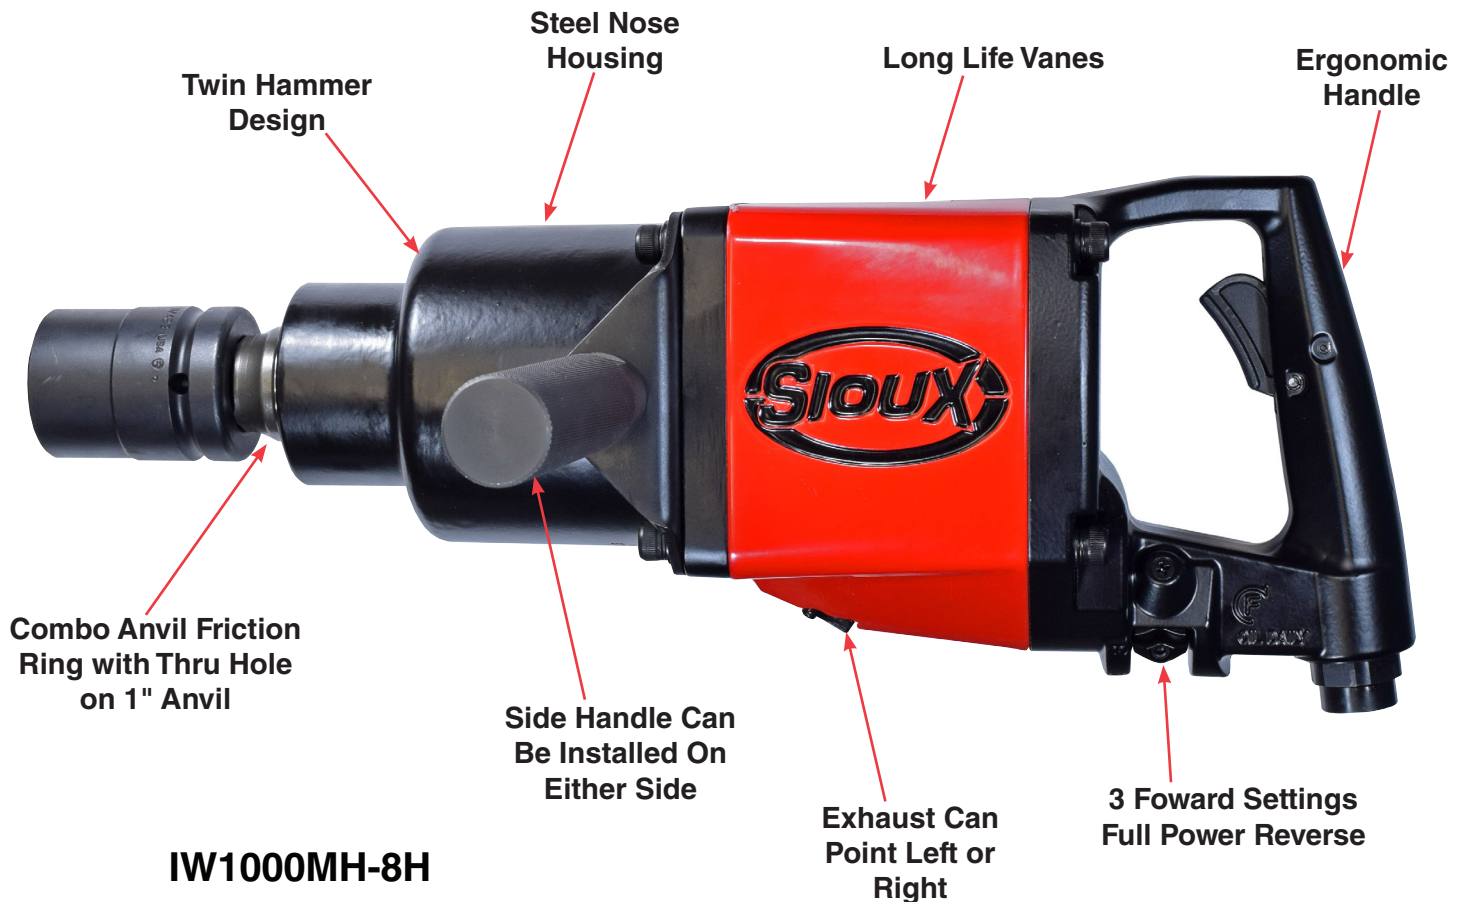

Key Features:

D-Handle

Inside Trigger

Steel Nose Housing

Versatile Twin Hammer

Forged and High-Alloy Steel Impact Components for Long Life


D-HANDLE IMPACT WRENCHES



IW1000MP-8H

Choose From:

- 1", 1-1/2", #5 Spline Drive
- Standard, Long & Extra Long Anvils

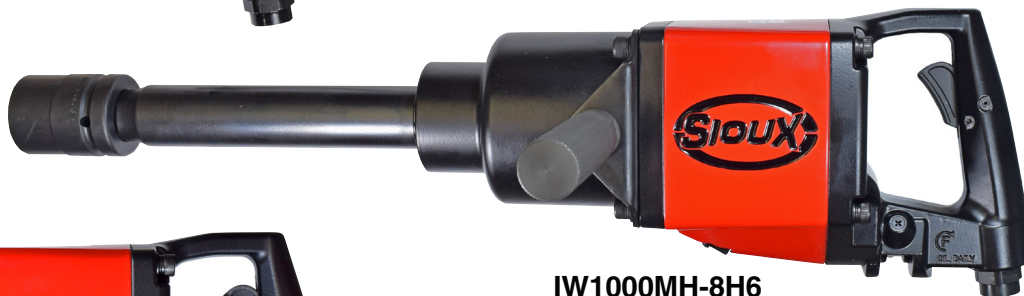

IW1000MH-8H6

#5 Spline



IW1000MH-5S



Model Number	Drive Size	Bolt Cap Grade 5		Max. Working Torque ¹		Maximum Torque		Blows Per Minute	Free Speed	Weight		Length		Side To Center		Avg Air Consumption		Socket Retainer Style	
		in	mm	ft lb	Nm	ft lb	Nm			lb	kg	in	mm	in	mm	cfm	l/s		
Heavy Duty Class																			
IW1000MP-8H	1	1-1/4	32	1200	1630	1700	2300	825	6500	18.2	8.3	14.8	375	1.85	47	34	16	Hole/Ring	
IW1000MP-8H5	1	1-1/4	32	1200	1630	1700	2300	825	6500	19.7	8.9	19.3	490	1.85	47	34	16	Hole/Ring	
IW1000MP-8H8	1	1-1/4	32	1200	1630	1700	2300	825	6500	20.7	9.4	22.3	560	1.85	47	34	16	Hole/Ring	
Super Duty Class																			
IW1000MH-8H	1	1-1/2	39	2100	2840	2500	3380	800	4000	33.4	15.2	17.0	430	2.5	65	50	24	Hole/Ring	
IW1000MH-8H6	1	1-1/2	39	2100	2840	2500	3380	800	4000	37.3	16.9	24.1	610	2.5	65	50	24	Hole/Ring	
IW1000MH-12H	1-1/2	1-1/2	39	2100	2840	2500	3380	800	4000	33.9	15.4	17.2	440	2.5	65	50	24	Hole	
IW1000MH-5S	#5 Spline	1-1/2	39	2100	2840	2500	3380	800	4000	33.7	15.3	17.6	450	2.5	65	50	24	Pin	



¹ Maximum working torque determined by 5 second rundown on appropriate Skidmore-Wilhelm Torque-Tension Tester.
General: Air Inlet Size: 1/2" NPT • Recommended Hose Size: 1/2" (30 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

siouxtools.com



250 Snap-on Drive
 P.O. Box 1596
 Murphy, North Carolina USA 28906
 PH: 828.835.9765
 FAX: 828.835.9685
 TOLL FREE: 866.259.7291
 TOLL FREE FAX: 800.722.7236

Belgium
 Tel.: 32 (0)14 23 19 67
 Fax: 32 (0)14 23 26 27
 Email: Industrial.be@snapon.com

Netherlands
 Tel.: 31 (0)88 0104000
 Fax: 31 (0)88 0104010
 Email: Industrial.nl@snapon.com

Latin America
 Tel.: 786-254-7765
 Fax: 786-534-9350
 e-mail: latinamerica.caribbean@snapon.com

Germany
 Tel.: 49 2104 9509-0
 Fax: 49 2104 9509-99
 e-mail: indus.germany@snapon.com

Italy
 Tel.: 00 39 02 66 04 53 70
 Fax: 00 39 02 61 29 78 15
 e-mail: indus.italia@snapon.com

United Kingdom
 Tel.: 44 (0) 1536-413904
 Fax: 44 (0) 1536-413874
 e-mail: industrialuk@snapon.com

Asia
 Tel.: 65-6451-5570
 Fax: 65-6451-5574
 e-mail: esales.sg@snapon.com

Australia
 Tel.: 61 2 9837 9100
 Fax: 61 2 9624 2578
 e-mail: SOTA.customerservice@snapon.com

Distributed By:

