


## Orbital Sander Backing Pads

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are a 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.

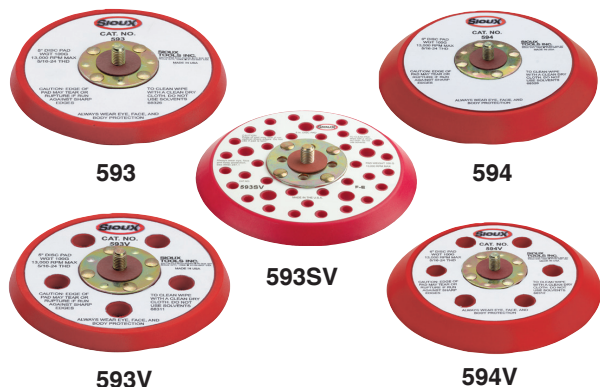

Part Number	Diameter		Backing	Profile	Style
	in	mm			
593	5	125	PSA <sup>1</sup>	Low	Non-Vac
593V	5	125	PSA <sup>1</sup>	Low	Vacuum
593J	5	125	H&L <sup>2</sup>	Low	Non-Vac
593JV	5	125	H&L <sup>2</sup>	Low	Vacuum
593SV	5	125	PSA <sup>1</sup>	Low	Screen Vac
594	6	150	PSA <sup>1</sup>	Tapered	Non-Vac
594V	6	150	PSA <sup>1</sup>	Tapered	Vacuum
594J	6	150	H&L <sup>2</sup>	Tapered	Non-Vac
594JV	6	150	H&L <sup>2</sup>	Tapered	Vacuum
594SV	5	125	PSA <sup>1</sup>	Low	Screen Vac

<sup>1</sup> PSA - Vinyl face for pressure sensitive adhesive sanding discs

<sup>2</sup> H&L - Hook and loop face

## Speed-Lok Backing Pads

For use on tools with 1/4" collets



Part Number	Diameter		Hex Size
	in	mm	
587M	2	50	1/4"
588M	3	75	1/4"

## Fibre Backing Discs

### Part No 586

For use on 5540 series sander

Packaged in cartons of 6

Qty 3 - 3" (75 mm)


Qty 3 - 4-1/2" (110 mm)

Both have 7/8" (22 mm) arbor hole



## Speed-Lok Abrasive Discs

For use on Speed-Lok Backing Pads



Part Number	Diameter		Grit
	in	mm	
587-60	2	50	60
587-120	2	50	120
587-240	2	50	240
588-60	3	75	60
588-120	3	75	120
588-240	3	75	240

## Backing Pads

For use on tools with 1/4" collets



**581, 2344, 2364**

Part Number	Diameter		For Use On
	in	mm	
581*	5	125	7/16"-20 spindle thread
2344*	5	125	3/8"-24 spindle thread
2364*	5	125	5/8"-11 spindle thread

\*includes disc nut 563



**5205**




**5207**

Part Number	Diameter		For Use On
	in	mm	
5205+	5	125	5265
5207*	7	180	5287A

\*includes disc nut No. 67630

+does not include disc nut No. 67630 (order separately)



**505079**

Part Number	Diameter		For Use On
	in	mm	
505079	2.75 X 17.5	70 X 445	5560