



DRILLS

We Take On Any Job... Bit By Bit

Sioux Tools offers a wide selection of Force drills. With free speeds from 550 to 2,300 rpm we have the right drill for most applications and materials. The gears are designed and built tough to handle demanding jobs, yet even under load, operate quietly and efficiently. Force drills come in both reversing and non-reversing models.

PISTOL GRIP DRILLS



FDR5440

- Features:
- Keyed Chuck
 - Aluminum Housing
 - Non-Reversible



5440KL

- Features:
- Keyless Chuck
 - Aluminum Housing
 - Non-Reversible


Non-Reversible



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
Keyed Chuck								
FDR5440	3/8	10	2300	2.1	1.0	7.9	190	3/8"-24
Keyless Chuck								
5440KL	3/8	10	2300	2.1	1.0	7.5	190	3/8"-24

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual

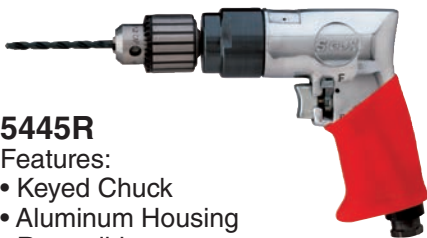

5445R

- Features:
- Keyed Chuck
 - Aluminum Housing
 - Reversible



5450R

- Features:
- Keyed Chuck
 - Aluminum Housing
 - Reversible
 - Support Handle



5450RKL

- Features:
- Keyless Chuck
 - Aluminum Housing
 - Reversible
 - Support Handle

Reversible



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
Keyed Chuck								
5445R	3/8	10	1800	3.0	1.4	8.0	200	3/8"-24
5450R	1/2	13	550	4.3	1.95	9.25	235	1/2"-20
Keyless Chuck								
5445RKL	3/8	10	1800	3.0	1.4	8.0	200	3/8"-24
5450RKL	1/2	13	550	4.3	1.95	9.25	235	1/2"-20

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual



DRILLS

INLINE AIR DRILLS

Features:

- Non-Reversible
- Lockoff Lever Throttle
- Rear Exhaust
- Aluminum Housing

Inline Air Drills



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
Keyed Chuck								
5434	3/8	10	2500	2.0	0.9	8.0	200	3/8"-24
Keyless Chuck								
5434KL	3/8	10	2500	2.0	0.9	8.0	200	3/8"-24

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual



5434



5434KL

Features:

- Reversible
- Built-in Speed Regulator
- Rear Exhaust
- Aluminum Housing

Right Angle Drills



Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Spindle Thread
	in	mm		lb	kg	in	mm	
Keyed Chuck								
FDR5430	3/8	10	1200	2.5	1.1	8.0	200	3/8"-24
Keyless Chuck								
5430KL	3/8	10	1200	2.5	1.1	8.0	200	3/8"-24

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety and Instruction Manual



FDR5430



5430KL

RIGHT ANGLE DRILLS



2352

Quick Change Chuck: Part No. 2352

Adapts 3/8"-24 threaded spindles to 1/4" hex quick change



506156 / 506155

Side Handle

Part Number	Description	Used On
506155	Clamp Ring	5450R
506156	Handle	5450R

DRILL ACCESSORIES

Drill Chucks & Keys

Chuck Capacity	Thread Size	Chuck Part No	Key Part No	Key Holder No
0 - 1/4"	3/8"-24	SP21019B	30000	
1/16" - 3/8"	3/8"-24	SP21133	30002	14273
5/64" - 1/2"	3/8"-24	SP21132	30429	
0 - 3/8"	1/2"-20	SP21002	30011	14273
1/16" - 3/8"	1/2"-20	SP21131	30002	
5/64" - 1/2"	1/2"-20	SP21137	30011	14273
0" - 1/2"	1/2"-20	SP74222	30429	
1/16" - 3/8"	3/8" - 24	SP65562		
5/64" - 1/2"	1/2" - 20	SP506209		
1/32" - 3/8"	3/8"-24	SP67398		
1/16" - 1/2"	1/2"-20	SP67397		



SP21137



SP65562



SP67398

¹Keyless Chuck • Keyed chucks include key