




COMPACT BELT SANDER

Quickly Finish Difficult Shapes

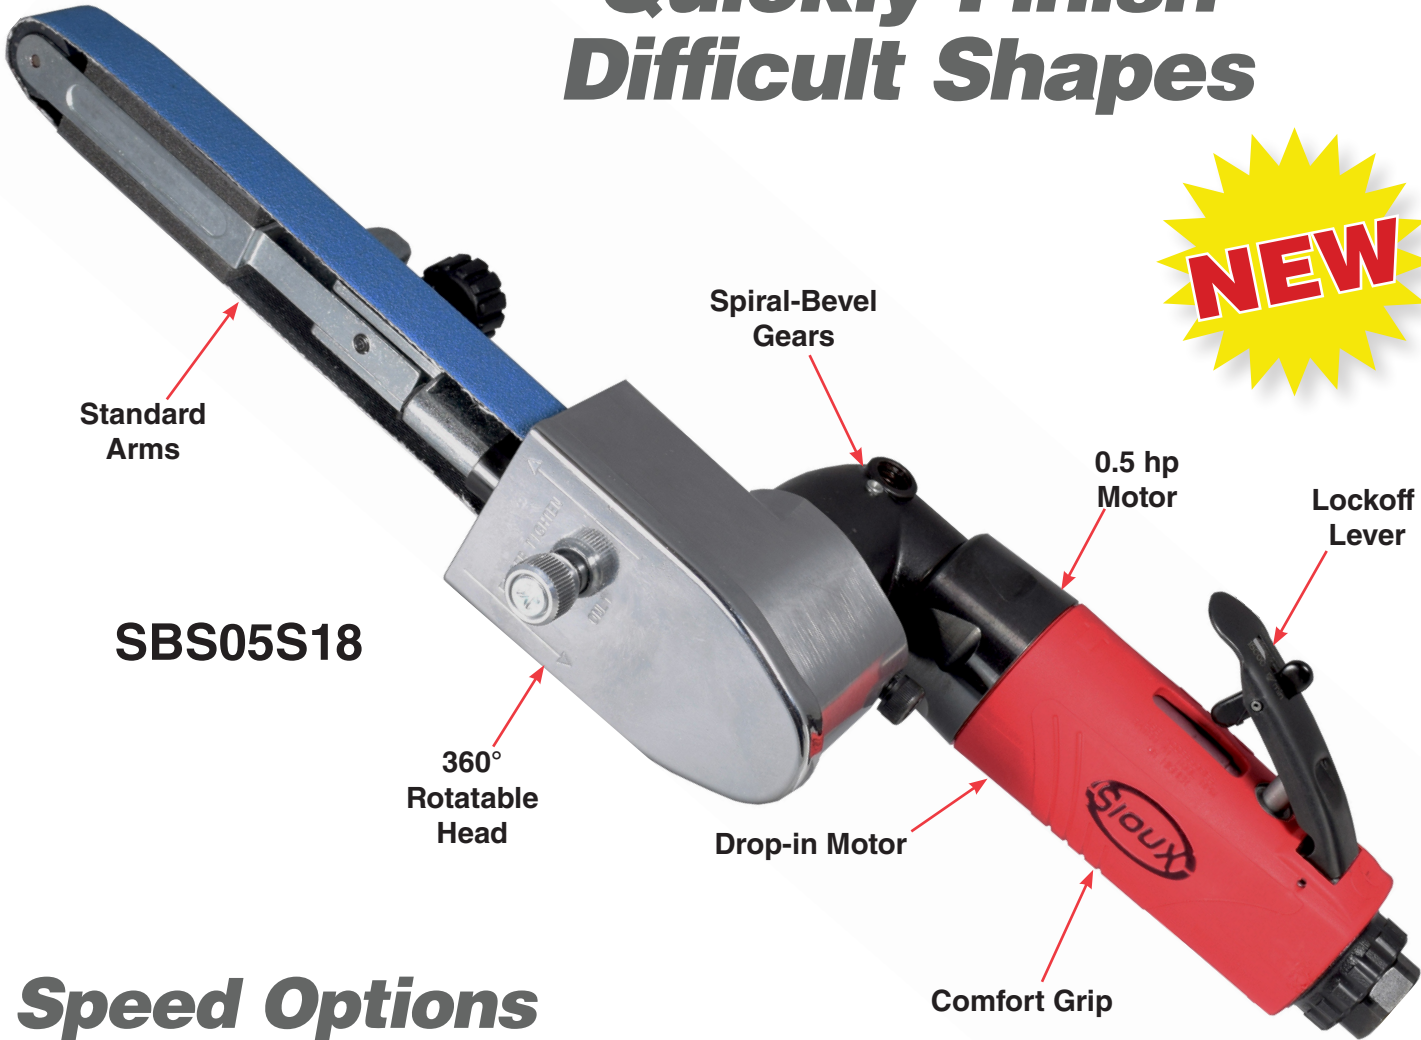

SBS05S18

Speed Options Available

Sand



Polish



Deburr



COMPACT BELT SANDER



SBS05S18

Belt Sander



Model Number	Belt Speed	Spindle Speed	Weight		Length		Air Consumption		Exhaust
	sfp/m	rpm	lb	kg	in	mm	cfm	l/s	
0.5 hp (0.37 kW)									
SBS05S12	2700	12000	2.8	1.3	14.2	360	23	11	Rear
SBS05S18	4100	18000	2.8	1.3	14.2	360	23	11	Rear

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure
Standard Equipment: Parts List • Safety & Instruction Manual • 571-618F contact arm • Hex key for head positioning



571-618F



571-418F



571-218C

Arms

Model Number	Arm Usage	Belt Size	Arm	Wheel		
				Shape	Width	Diameter
571-618F	Multi-Purpose	3/4 x 18	2 Platen Pads	Flat	0.57	0.71
571-418F	Multi-Purpose	1/2 x 18	2 Platen Pads	Flat	0.32	0.59
571-218C	Tubing, Curves and Fillets	1/4-1/2 x 18	Offset	Curved	0.32	0.97

siouxtools.com



250 Snap-on Drive
 P.O. Box 1596
 Murphy, North Carolina USA 28906
 PH: 828.835.9765
 FAX: 828.835.9685
 TOLL FREE: 866.259.7291
 TOLL FREE FAX: 800.722.7236

Belgium
 Tel.: 32 (0)14 23 19 67
 Fax: 32 (0)14 23 26 27
 Email: Industrial.be@snapon.com

Netherlands
 Tel.: 31 (0)88 0104000
 Fax: 31 (0)88 0104010
 Email: Industrial.nl@snapon.com

Latin America
 Tel.: 786-254-7765
 Fax: 786-534-9350
 e-mail: latinamerica.caribbean@snapon.com

Germany
 Tel.: 49 2104 9509-0
 Fax: 49 2104 9509-99
 e-mail: indus.germany@snapon.com

Italy
 Tel.: 00 39 02 66 04 53 70
 Fax: 00 39 02 61 29 78 15
 e-mail: indus.italia@snapon.com

United Kingdom
 Tel.: 44 (0) 1536-413904
 Fax: 44 (0) 1536-413874
 e-mail: industrialuk@snapon.com

Asia
 Tel.: 65-6451-5570
 Fax: 65-6451-5574
 e-mail: esales.sg@snapon.com

Australia
 Tel.: 61 2 9837 9100
 Fax: 61 2 9624 2578
 e-mail: SOTA.customerservice@snapon.com