




D-HANDLE IMPACT WRENCHES

POWER UP TO NEW 1", 1-1/2", & #5 SPLINE IMPACTS

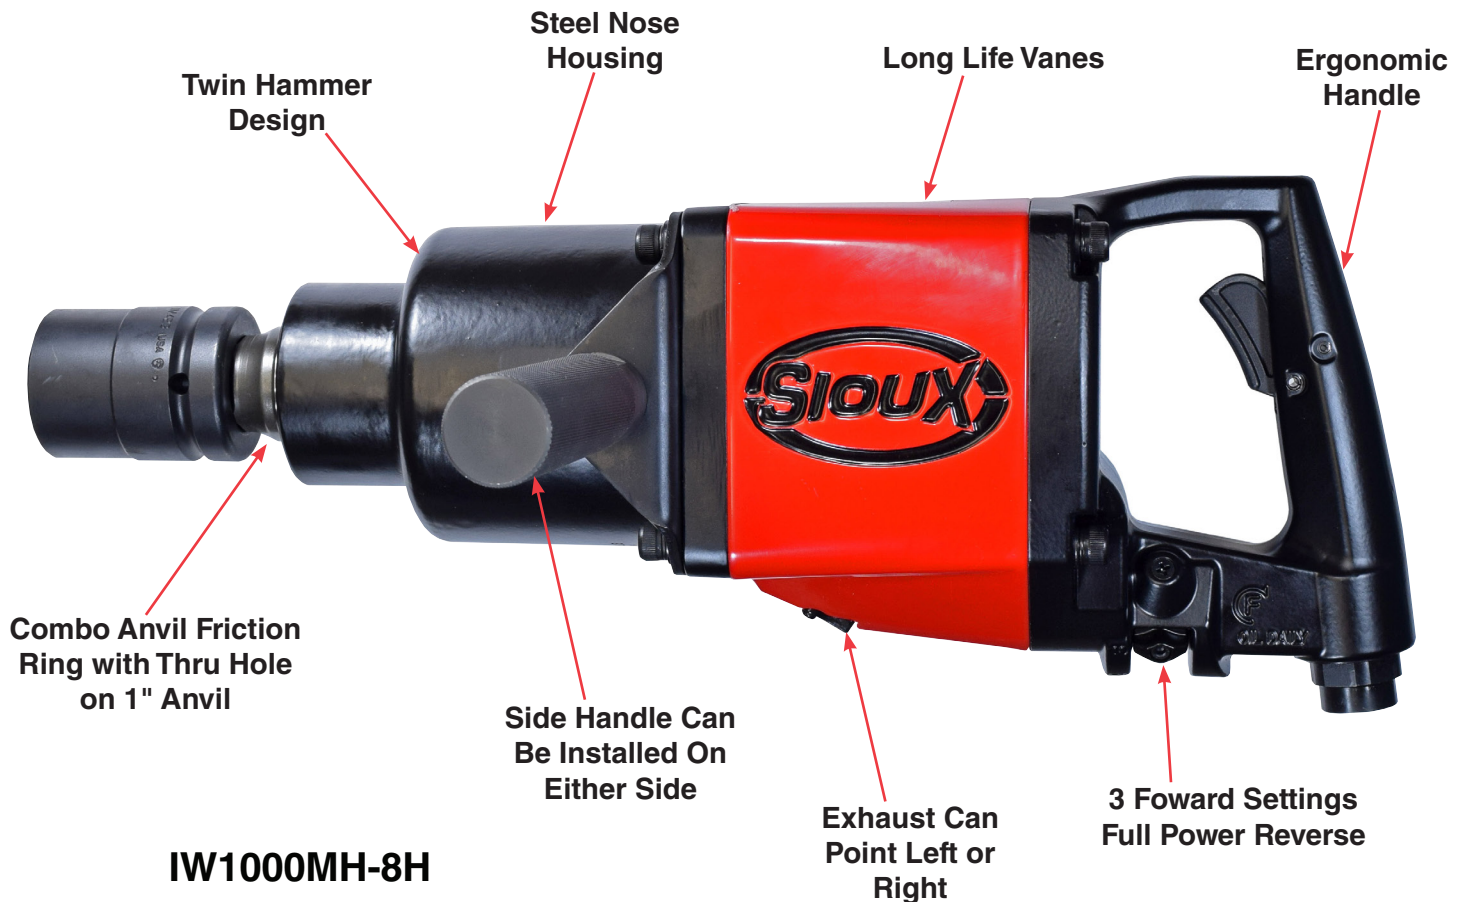

Key Features:

D-Handle

Inside Trigger

Steel Nose Housing

Versatile Twin Hammer

Forged and High-Alloy Steel Impact Components for Long Life


D-HANDLE IMPACT WRENCHES



IW1000MP-8H

Choose From:

- 1", 1-1/2", #5 Spline Drive
- Standard, Long & Extra Long Anvils

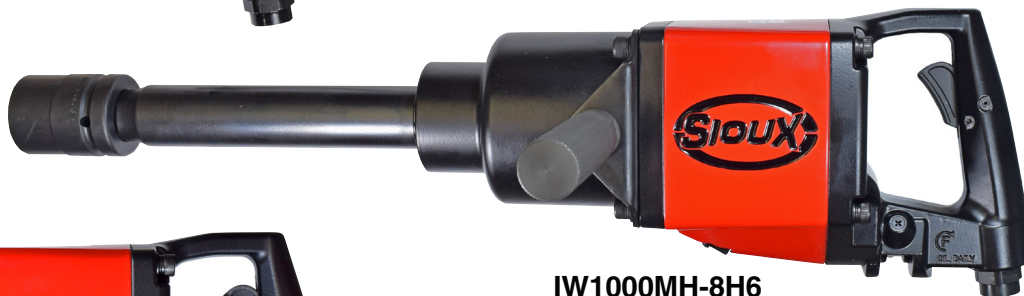

IW1000MH-8H6

#5 Spline



IW1000MH-5S



Model Number	Drive Size in	Bolt Cap Grade 5		Max. Working Torque ¹		Maximum Torque		Blows Per Minute	Free Speed rpm	Weight		Length		Side To Center		Avg Air Consumption		Socket Retainer Style	
		in	mm	ft lb	Nm	ft lb	Nm			lb	kg	in	mm	in	mm	cfm	l/s		
Heavy Duty Class																			
IW1000MP-8H	1	1-1/4	32	1200	1630	1700	2300	825	6500	18.2	8.3	14.8	375	1.85	47	34	16	Hole/Ring	
IW1000MP-8H5	1	1-1/4	32	1200	1630	1700	2300	825	6500	19.7	8.9	19.3	490	1.85	47	34	16	Hole/Ring	
IW1000MP-8H8	1	1-1/4	32	1200	1630	1700	2300	825	6500	20.7	9.4	22.3	560	1.85	47	34	16	Hole/Ring	
Super Duty Class																			
IW1000MH-8H	1	1-1/2	39	2100	2840	2500	3380	800	4000	33.4	15.2	17.0	430	2.5	65	50	24	Hole/Ring	
IW1000MH-8H6	1	1-1/2	39	2100	2840	2500	3380	800	4000	37.3	16.9	24.1	610	2.5	65	50	24	Hole/Ring	
IW1000MH-12H	1-1/2	1-1/2	39	2100	2840	2500	3380	800	4000	33.9	15.4	17.2	440	2.5	65	50	24	Hole	
IW1000MH-5S	#5 Spline	1-1/2	39	2100	2840	2500	3380	800	4000	33.7	15.3	17.6	450	2.5	65	50	24	Pin	

¹ Maximum working torque determined by 5 second rundown on appropriate Skidmore-Wilhelm Torque-Tension Tester.

General: Air Inlet Size: 1/2" NPT • Recommended Hose Size: 1/2" (30 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

siouxtools.com



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Belgium
Tel.: 32 (0)14 23 19 67
Fax: 32 (0)14 23 26 27
Email: Industrial.be@snapon.com

Netherlands
Tel.: 31 (0)88 0104000
Fax: 31 (0)88 0104010
Email: Industrial.nl@snapon.com

Latin America
Tel.: 786-254-7765
Fax: 786-534-9350
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: indus.germany@snapon.com


Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
e-mail: esales.sg@snapon.com

Australia
Tel.: 61 2 9837 9100
Fax: 61 2 9624 2578
e-mail: SOTA.customerservice@snapon.com

Distributed By:



FORM# ZML0184 • Date: 10-21