



**IW38HAP SERIES**

When you need  
to have the right impact.



**ASSEMBLY**

The Sioux Tools **IW38HAP Series** Composite Air Impact Wrenches provide you with all the power you need in a specially engineered lightweight reinforced composite housing. So you get the torque you need without added weight. This makes the **IW38HAP** perfect for a wide range of applications.

Push button forward/reverse make for easy one-hand operation and the thumb operated speed regulator gives unparalleled control. The steel hammer case and twin hammer impact mechanism with oil bath allows a working torque

range from 60 to 200 ft. lb. (80-270 Nm), while the overmolded ergonomic handle grip makes it comfortable to operate.

The **IW38HAP Series** comes in three models that give you the option of 3/8", 1/2" square or 7/16" hex drive sizes, all in a lightweight 3.3 pound tool that delivers 1380 blows per minute. These tools are engineered for a variety of industrial applications that range from general industrial, MRO, woodworking and automotive aftermarket to name a few.



# IW38HAP SERIES



# SPECIFICATIONS



## Impact Wrench


Model Number	Drive Size		Bolt Cap. Grade 5		*Working Torque Range		Max Torque		Blows per Minute	Free Speed rpm	Weight		Length		Avg. Air Consum		Socket Retainer Style
	in.	mm	in.	mm	ft lb	Nm	ft. lb	Nm			lb	kg	in	mm	in	mm	
IW38HAP-3P	3/8	10	5/8	15	60 - 200	80 - 270	250	340	1380	11,000	3.3	1.5	6.5	165	3.4	1.6	Pin
IW38HAP-4P	1/2	13	5/8	15	60 - 200	80 - 270	250	340	1380	11,000	3.3	1.5	6.5	165	3.4	1.6	Pin
IW38HAP-7Q	7/16	11	5/8	15	60 - 200	80 - 270	250	340	1380	11,000	3.3	1.5	6.5	165	3.4	1.6	Hex QC

### General:

Air Inlet: 1/4" NPT  
 Recommended Hose Size: 3/8" (10 mm)  
 Tool performance rated at 90 psig (6.2 bar) air pressure  
 Tools available with BSPT air inlet upon request

### Standard Equipment:

Parts List, Safety & Instruction Manual  
 Over Molded Handle Grip  
 Suspension Bail

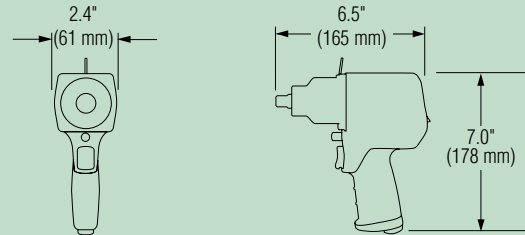

Eye protection must be worn while operating power tools

\*Tested on Skidmore-Wilhelm and run for 5 seconds

**SIoux TOOLS INC.**



250 Snap-on Drive  
 P.O. Box 1596  
 Murphy, North Carolina USA 28906  
 PH: 828.835.9765  
 FAX: 828.835.9685  
 TOLL FREE: 866.259.7291  
 TOLL FREE FAX: 800.722.7236

Germany  
 Tel.: 49 2104 9509-0  
 Fax: 49 2104 9509-99  
 e-mail:  
 snapon.industrial@snapon.com

Australia  
 Tel.: 61 2 9837 9130  
 Fax: 61 2 9624 2578  
 e-mail:  
 SOTA.customerservice@snapon.com

Benelux  
 Tel.: (N) 31 (0) 20 568 26 63  
 (B) 32 (0) 14 23 19 67  
 Fax: (N) 31 (0) 20 568 26 60  
 (B) 31 (0) 14 23 26 27  
 e-mail: snap@snap-on.nl

Italy  
 Tel.: 00 39 02 66 04 53 70  
 Fax: 00 39 02 61 29 78 15  
 e-mail: indus.italia@snapon.com

United Kingdom  
 Tel.: 44 (0) 1536-413904  
 Fax: 44 (0) 1536-413874  
 e-mail: industrialuk@snapon.com

Latin America  
 Tel.: 305-271-0944  
 Fax: 305-271-7152  
 e-mail:  
 latinamerica.caribbean@snapon.com

Asia  
 Tel.: 65-6451-5570  
 Fax: 65-6451-5574  
 email: esales.sg@snapon.com

FORM# ZML0081  
 PRINTED IN USA  
 11/03 5M

[www.sioxtools.com](http://www.sioxtools.com)

