


Speed-Lok Backing Pads

For use on SAS series sanders

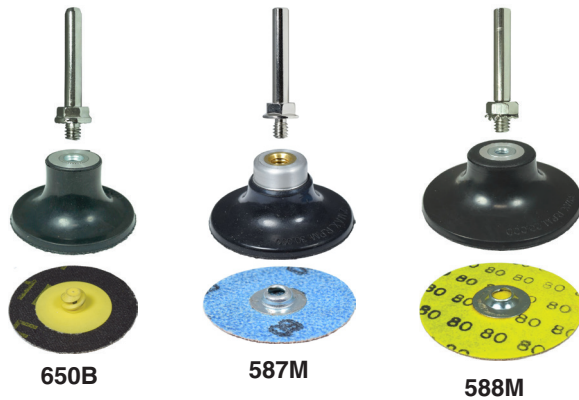

Features:

1/4" Shank
1/4"-20 Thread

Part Number	Type	Diameter		Max. rpm
		in	mm	
650B	R (plastic)	2	50	30000
587M	S (metal)	2	50	30000
588M	S (metal)	3	75	20000

*Sanding Disc Not Included

Fibre Backing Discs

Part No 586

For use on SPS10P series sanders

Packaged in cartons of 6

Qty 3 – 3" (75 mm)

Qty 3 – 4-1/2" (110 mm)



5" Backing Pad – Dual Thread


For use on SAS10 & SPS10P series sanders



Part Number	Thread	Diameter	
		in	mm
2344	3/8-24 & 5/8-11	5	125

Includes disc nut 30750

7" & 9" SANDER BACKING PAD KITS

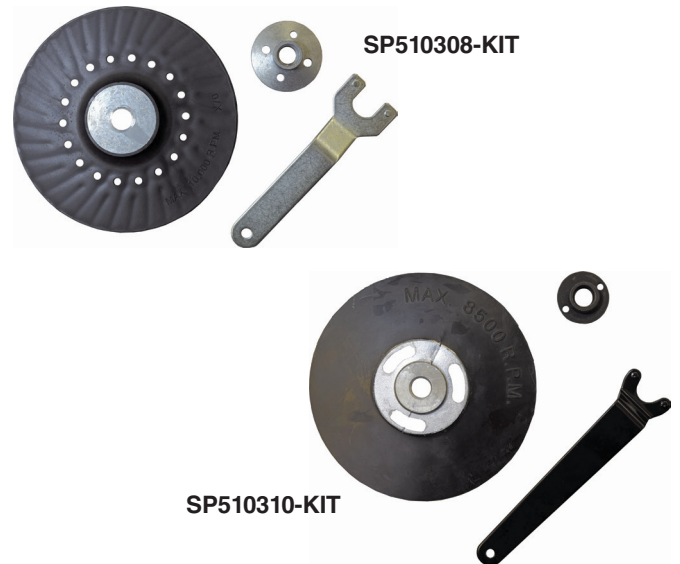

Part Number	Thread	Stiffness	Max RPM	Diameter	
				in	mm
SP510308-KIT	5/8-11	Stiff (Nylon)	10000	7	175
SP510309-KIT	5/8-11	Stiff (Nylon)	9000	9	230
SP510310-KIT	5/8-11	Soft (Rubber)	8500	7	175



Part Number	Description
545 Standard Fiberglass Kit	
544	Disc holder
548	Backing disc with lock nut
68015	Wrench
545H Heavy-Duty Fiberglass Kit	
544	Disc holder
548H	Heavy-duty backing disc with lock nut
68015	Wrench




SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1

Orbital Sander Backing Pads

Sioux random orbital backing pads are medium density, urethane pads rated for speeds up to 13,000 rpm. The 5" pads are a 3/8" thick with low profile design, while the 6" pads are 5/8" thick with tapered profile for fine feathering in corners or around edges.

5/16" - 24 Spindle Thread

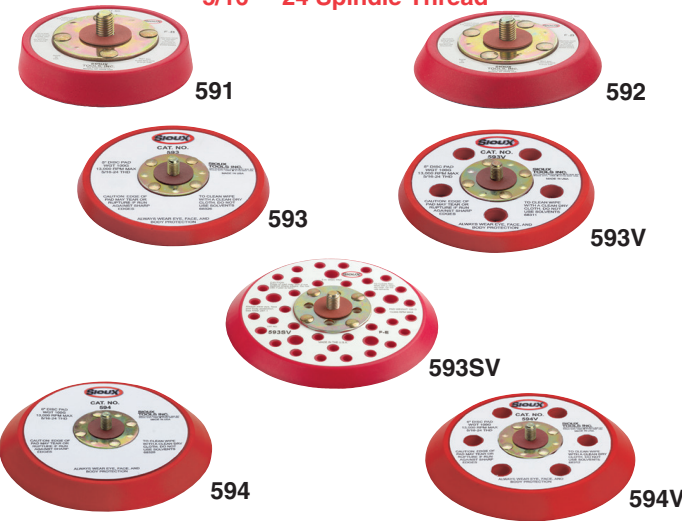

Part Number	Diameter		Backing	Profile	Style
	in	mm			
591	3	75	PSA	Low	Vac/Non-Vac
591J	3	75	H & L	Low	Vac/Non-Vac
592	3.5	90	PSA	Tapered	Vac/Non-Vac
592J	3.5	90	H & L	Tapered	Vac/Non-Vac
593	5	125	PSA	Low	Non-Vac
593V	5	125	PSA	Low	Vacuum
593J	5	125	H & L	Low	Non-Vac
593JV	5	125	H & L	Low	Vacuum
593SV	5	125	PSA	Low	Screen Vac
594	6	150	PSA	Tapered	Non-Vac
594V	6	150	PSA	Tapered	Vacuum
594J	6	150	H & L	Tapered	Non-Vac
594JV	6	150	H & L	Tapered	Vacuum
594SV	6	150	PSA	Low	Screen Vac

PSA – Vinyl face for pressure sensitive adhesive sanding discs
H & L – Hook and loop face

8" Polishing Accessories



Part Number	Description
846C*	Backing pad (Includes 524)
524*	Retaining nut
1211B*	Wool polishing pad (pkg 10)
847	Hook & loop backing pad
1220	Hook & loop polishing pad (pkg 10)
843	Tie-on wool bonnet (pkg 10)

* Standard equipment on polishers

Dustless Vacuum Shrouds

Random Orbital Sander Vacuum Shroud
Sioux Models
RO25VS-5 and RO25VS-6



- Fit RO25 Series Random Orbital Sanders
- Available For 5" Or 6" Sanders
- Captures 99% Of Airborne Dust
- Protects Workers From Harmful Airborne Dust
- Flexible And Transparent For Better Visibility
- Includes 6 Ft. Vacuum Hose

Part Number	Description
RO25VS-5	5" Vacuum Shroud
RO25VS-6	6" Vacuum Shroud



SAFETY PRECAUTION: Read and follow all safety and operating instructions.
WARNING: Face & eye protection must be worn while operating power tools, per ANSI B186.1